



IMMERSED SUCTION FILTERS




IMMERSED SUCTION FILTERS

Technical Information

Materials:

- Connection: Nylon.
- Support tubes: Galvanised Steel.
- Cap: Galvanised Steel.
- Temperature: From -10°C to +100°C.

	NOMINAL FLOW	A ("BSP)	H (mm)	B (mm)	µm
HID27645	5	1/4"	50	32	125
HID32902*	10	3/8"	90	46	125
HID4369	15	1/2"	105	45	125
HID19853	25	3/4"	110	65	90
HID19856	50	1"	140	65	90
HID27641*	75	1 1/4"	84	140	125
HID4738	100	1 1/2"	140	86	125
HID6714	130	1 1/2"	194	85	90
HID19855	180	2"	260	86	125
HID19850	225	2"	150	150	125
HID6715	350	2 1/2"	190	150	90
HID19851	500	3"	270	150	125

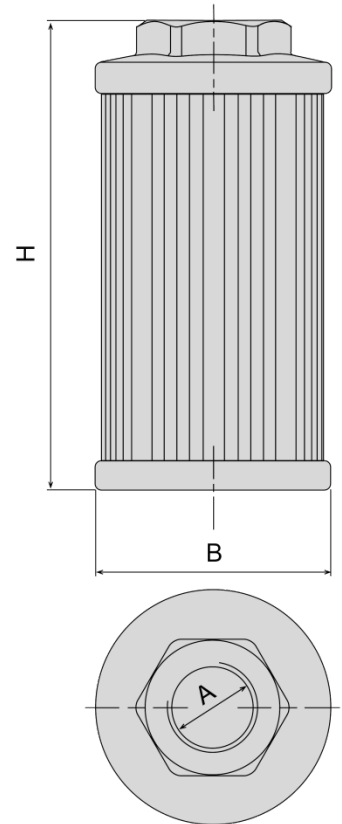

* These references are supplied with galvanised steel connection instead of nylon.

