


# LOW PRESSURE SPIN-ON FILTERS

(HEADS AND FILTER ELEMENTS)



HEAD	
<b>HHID012050-1</b>	
MAX. OPERATING PRESSURE (bar)	12
THREAD	¾"
NOMINAL FLOW (l/min)	50
BYPASS VALVE (bar)	1,72

FILTER ELEMENTS COMPATIBLE WITH HEAD HHID012050-1				
REFERENCE	MICRONAGE (μ)	HEIGHT (mm)	OUTER DIAMETER (mm)	FILTER MEDIA
HID4668	10	142	94	CELLULOSE
HID16332	25	142	94	CELLULOSE

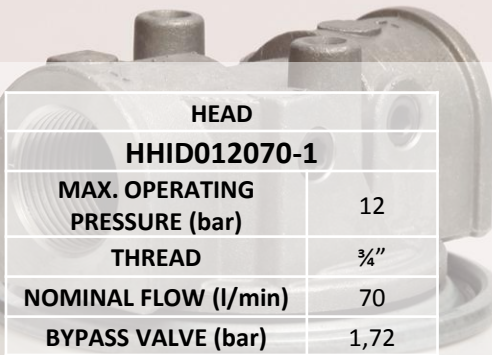

HEAD	
<b>HHID012070-1</b>	
MAX. OPERATING PRESSURE (bar)	12
THREAD	¾"
NOMINAL FLOW (l/min)	70
BYPASS VALVE (bar)	1,72

FILTER ELEMENTS COMPATIBLE WITH HEAD HHID012070-1				
REFERENCE	MICRONAGE (μ)	HEIGHT (mm)	OUTER DIAMETER (mm)	FILTER MEDIA
HID72713	10	210	98	CELLULOSE
HID44305	25	210	98	CELLULOSE

HEAD	
<b>HHID012100-1</b>	
MAX. OPERATING PRESSURE (bar)	12
THREAD	1 ¼"
NOMINAL FLOW (l/min)	100
BYPASS VALVE (bar)	1,72

FILTER ELEMENTS COMPATIBLE WITH HEAD HHID012100-1				
REFERENCE	MICRONAGE (μ)	HEIGHT (mm)	OUTER DIAMETER (mm)	FILTER MEDIA
HID4672	10	180	128	CELLULOSE
HID5525	25	180	128	CELLULOSE

**HID16332**  
HYDRAULIC FILTER ELEMENT  
ELEMENTO FILTRANTE HIDRÁULICO

HEAD	
<b>HHID012150-1</b>	
MAX. OPERATING PRESSURE (bar)	12
THREAD	1 ¼"
NOMINAL FLOW (l/min)	150
BYPASS VALVE (bar)	1,72

FILTER ELEMENTS COMPATIBLE WITH HEAD HHID012150-1				
REFERENCE	MICRONAGE (μ)	HEIGHT (mm)	OUTER DIAMETER (mm)	FILTER MEDIA
HID4838	10	225	130	CELLULOSE
HID17425	25	225	130	CELLULOSE